

EMT300-E

Magnetic Non Dimmable MT

Outdoor Black Powder Coated Steel Enclosure

Multi Tap: **12-15VAC**


Total Wattage: **300W max**

Input Voltage: **120V 60Hz**



Conforms to UL STD. 1838
Certified to CSA
STD. C22.2 No 250.0, 250.7

Installation Instruction for

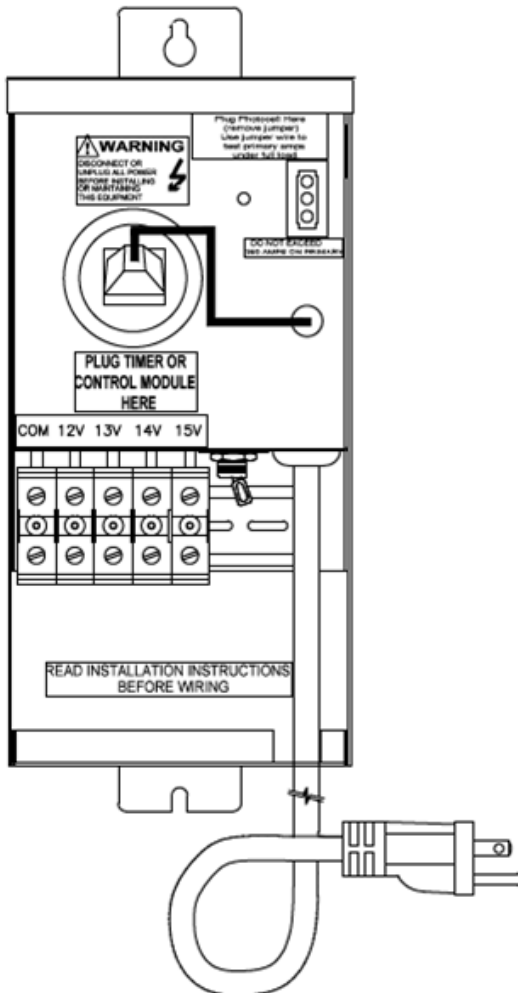

! WARNING

- * Read instruction completely before installation.
- * Turn off electricity before wiring.
- * Only qualified personal should install the unit.
- * Installation must comply with the NEC.
- * Ensure the unit has input, output voltage and output wattage proper for your application.

Mounting

The transformer must be mounted in a free flow air space for proper ventilation. The maximum ambient temperature should not exceed 50 deg. C (110 deg. F) Use the keyholes bracket to mount transformer vertically with wire compartment pointing down.

Input Connection

This transformer configured with line cord for easy input connection by plugging it into 120V 60Hz receptacle. The max. input current at fully loaded transformer should not exceed 0.35Amps for 40W, 0.63Amps for 75W, 3 Amps for 300W, 5Amps. For 600W, 7.5Amps for 900W and 10Amps for 1200W Transformers., check it by Ampere meter clamp on wire loop.

Output Connection

This unit has one com. and 4 taps: 12V, 13V, 14V, and 15V. Don't short the one tap to another. You can connect your lights to any tap in different combinations. The total wattage should not exceed 300W on any tap and on the com. For example: for 15V tap it's 300W divided by 15V=20Amps. 20Amps. Multiply by 12V=240W, so your lights total wattage on 15V tap 240W max. Always connect your lights to 12V tap first, check voltage on the lights, move to higher tap if the voltage less than 10.5V. We recommend max. voltage 11.5V. Make sure all your connection are very tight to avoid terminal block melting and wire burning. For voltage drop control see chart below.

| Wattage | 12 volt output | | | | 13 volt output | | | | 14 volt output | | | | 15 volt output | | | |
|---------|----------------|--------|--------|-------|----------------|--------|--------|-------|----------------|--------|--------|-------|----------------|--------|--------|-------|
| | 14 AWG | 12 AWG | 10 AWG | 8 AWG | 14 AWG | 12 AWG | 10 AWG | 8 AWG | 14 AWG | 12 AWG | 10 AWG | 8 AWG | 14 AWG | 12 AWG | 10 AWG | 8 AWG |
| 50W | 81 | 129 | 204.5 | 317 | 135.5 | 216 | 340 | 528 | 190 | 303 | 477 | 740 | 244 | 390 | 613 | 950 |
| 100W | 40.6 | 65 | 102 | 158 | 68 | 108 | 170 | 264 | 95 | 151 | 238.5 | 370 | 122 | 195 | 307 | 475 |
| 150W | 27 | 43 | 68 | 105 | 45 | 72 | 114 | 176 | 63 | 101 | 159 | 246 | 81 | 130 | 204.5 | 317 |
| 200W | 20 | 32 | 51 | 79 | 34 | 54 | 85 | 132 | 47.4 | 75.5 | 120 | 185 | 61 | 97 | 153 | 237 |
| 250W | 16.3 | 26 | 41 | 63.4 | 27 | 43.3 | 68.2 | 105.6 | 38 | 60.6 | 95.4 | 148 | 48.8 | 78 | 123 | 190 |
| 300W | 13.5 | 21.6 | 34 | 52.8 | 22.6 | 36 | 56.8 | 88 | 31.6 | 50.5 | 79.5 | 123 | 40.6 | 65 | 102 | 158 |

* Note: Min. Volts on the load is 10.5V @ 20°C; Distance in FT.

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com