

# ECV200-12DC

## Electronic Dimmable

Outdoor Aluminum With Wire Compartment Enclosure


Single Circuit: **12VDC**

Total Wattage: **200W max**

Input Voltage: **120V 50/60Hz**



Conforms to UL STD. 1012  
Certified to CSA  
STD. C22.2 nIS 107.1

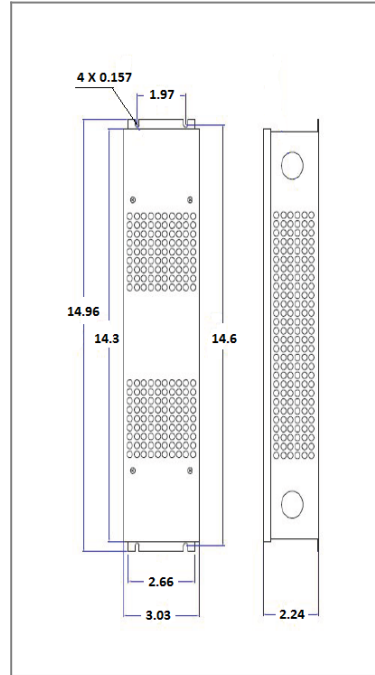

### Transformer


Dimmable with any ELV, MLV, CL, forward or reverse phase.  
Input leads are 18AWG 600V  
Output leads are 18AWG 300V  
Leads max. operational temperature is 105°C

### Housing

The actual transformer 200W is encapsulated in the enclosure  
The enclosure is Aluminum with wire compartment, IP 67 rated  
Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors  
Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded  
Dimensions (inch): H = 14.3, W = 3.03, D = 2.24  
Weight (LBs): 4

### Electrical Parameters

Input Voltage:	<b>120V 50/60Hz</b>
Max. input current at full load:	<b>3.6A</b>
Output voltage without load:	<b>12.2VDC</b>
Output voltage fully loaded:	<b>12VDC</b>
Max. Total Wattage:	<b>200W</b>
Max. Output Current:	<b>16.7A</b>
Efficiency:	<b>85%</b>
Load regulation:	<b>1%</b>
Ripple:	<b>10%</b>

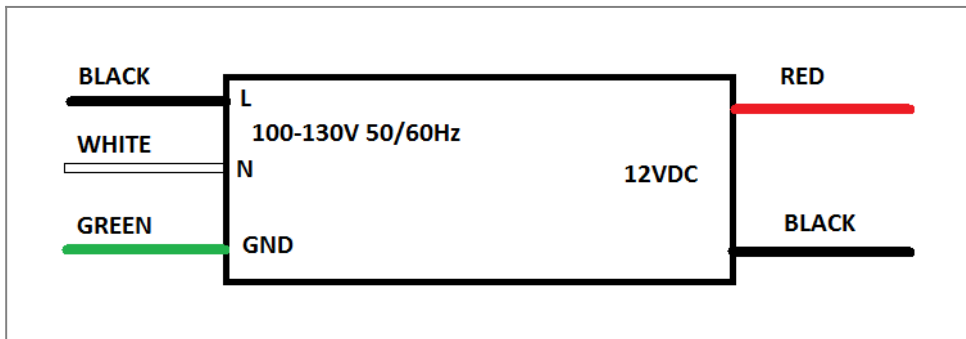

Mailing Address: 6925 Eton Ave. Canoga Park, CA 91303 Tech support: Arik Nirenberg phone: 818-904-3309 cellphone: 818-269-4091  
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com