ECV96-(24/48)DC-UD-2G

Class 2 Electronic UNIV 5 in 1 dimming

Black Powder Coated Steel Enclosure

Single Circuit: **24-48VDC**

Total Wattage: **96W max**

Input Voltage: **110-277V 50/60Hz**


EMCOD Lighting Group

www.emcod.com

c UL us LISTED E498696

Conforms to UL STD. 8750
Certified to CSA
STD. C22.2 № 250.13

Quick Setup Guide

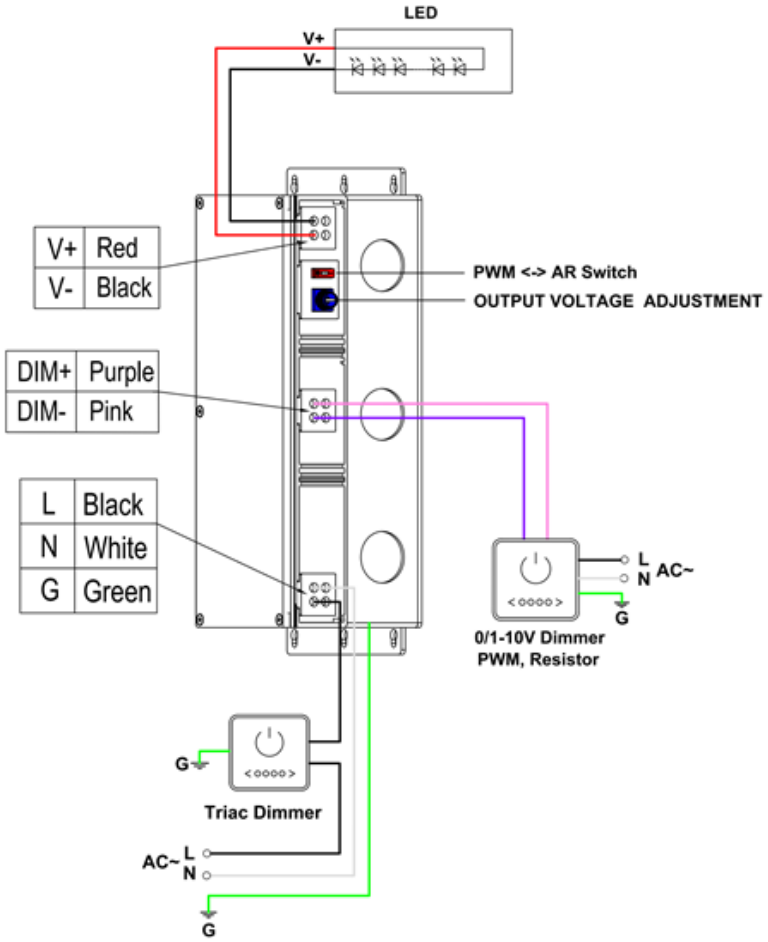

* Read instruction completely before installation.
* Turn off electricity before wiring.
* Only qualified personal should install the unit
* Installation must comply with the NEC.
* Ensure the unit has input, output voltage and output wattage proper for your application.

Mounting

The transformer must be mounted in at least 5" of a free flow air space for proper ventilation.

The transformer must never be mounted next to or above heat radiated objects.

The maximum ambient temperature should not exceed 45 deg. C (115 deg. F) at full load.

Connection

Open the wire compartment and remove knockouts for input and output, install strain reliefs (wire clamps). Use only right size and UL approved wire nuts.

Input Connection

Bring your line and neutral wires through input strain relief and connect them to the Black and White transformers leads.

Dimmers Connection

If you are going to use Phase cut (Triac) dimmer, connect it as on the diagram. If you going to use 0/1-10V, PWM dimmer or resistor, connect it to Purple+ and Pink-. Your power connect directly to the driver.

Output Connection

Bring your lights wires through output strain relief and connect to the Red + and Black - transformer leads. Make sure all your connection very tight

Grounding

The LED Driver is grounded to the enclosure. The enclosure in turn should be grounded in accordance with NEC and local code. Connect the transformer green wire to the ground.

For more info, please review complete engineering specifications and installation instruction on: www.emcod.com

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 techsupport@emcod.com