

ECV100-24DC-EU

Electronic UNIV 5 in 1 dimming

Outdoor Aluminum Enclosure

Single Circuit: **24VDC**



Total Wattage: **100W max**

Input Voltage: **230V 50/60Hz**



www.emcod.com

Installation Instruction

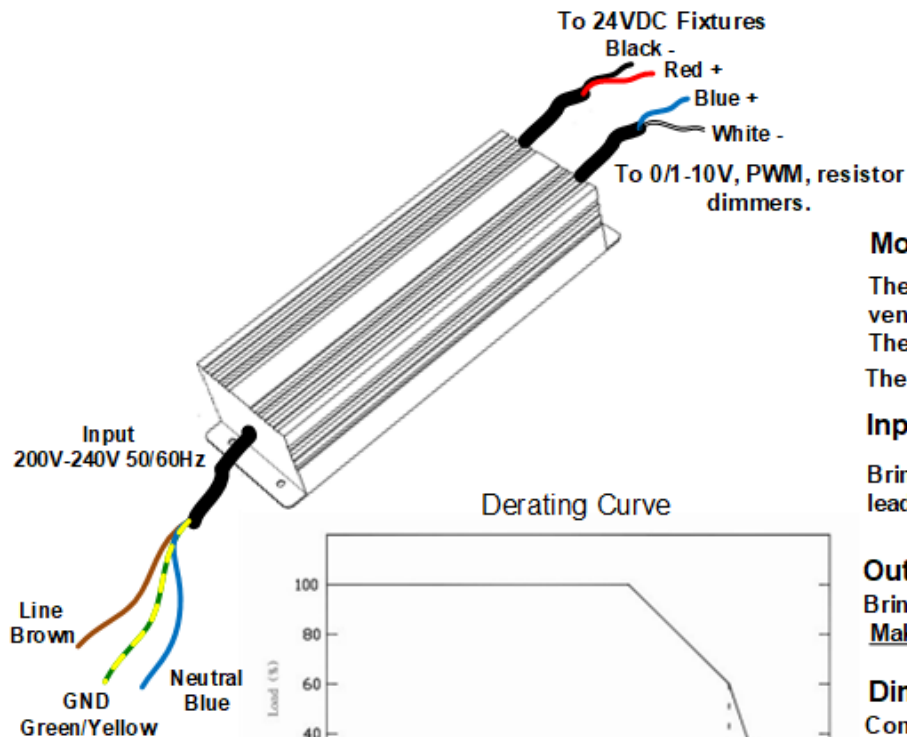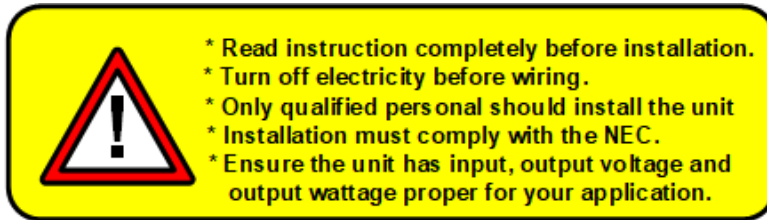

Mounting

The transformer must be mounted in at least 10" of a free flow air space for proper ventilation.

The transformer must never be mounted next to or above heat radiated objects.

The maximum ambient temperature should not exceed 50 deg. C (110 deg. F)

Input Connection

Bring your line and neutral wires and connect them to the Brown and Blue Driver's lead wires.

Output Connection

Bring your lights wires and connect them to the Red + and Black - Driver's lead wires.
Make sure all your connection very tight

Dimmer Connection

Connect your 0/1-10V or PWM or Resistor dimmer to the Blue+ and White - Driver's lead wires.

Grounding

The LED Driver is grounded to the enclosure. The enclosure in turn should be grounded in accordance with NEC and local code. Connect the Driver's Green/Yellow wire to the ground.

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 info@emcod.com techsupport@emcod.com