

## EMT-75-HL

### Magnetic

Outdoor Black Powder Coated Steel Enclosure


Multi Tap: **12-15VAC**

Total Wattage: **75W max**

Input Voltage: **120V 60Hz**



Conforms to UL STD. 1838  
Certified to CSA  
STD. C22.2 № 250.0, 250.7

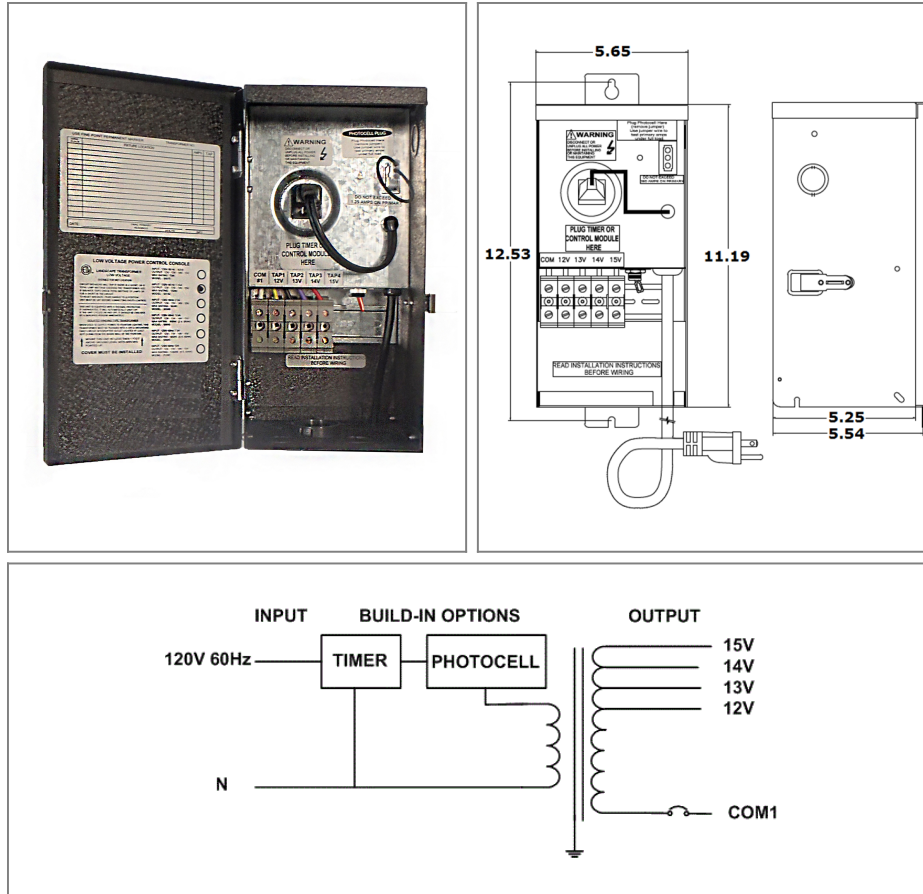

### Transformer

Temperature class B(130°C)

Input leads: Line cord

Output leads: Terminal Block

Magnetic manually reset secondary breaker 7A

Timer and photocell build in options

### Housing

The actual transformer 75W is encapsulated in the enclosure

The enclosure is Black Powder Coated Steel, NEMA 3R rated

Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 11.19, W = 5.65, D = 5.54

Weight (LBs): 1.04

### Electrical Parameters

Input Voltage: **120V 60Hz**

Max. input current at full load: **0.63A**

Output voltage without load: **12.4/ 13.4/ 14.1/ 15.4VAC**

Output voltage fully loaded: **11.4/ 12.4/ 13.4/ 14.3VAC**

Max. Total Wattage: **75W**

Max. Output Current: **6.2/ 5.8/ 5.4/ 5A**

Efficiency: **90%**

Load regulation: **0.09%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 info@emcod.com techsupport@emcod.com