MLE60-12(-)96-24-UD-

Class 2 Electronic UNIV 5 in 1 dimming

Outdoor Black Powder Coated Steel Enclosure

Single Circuit: **12(-)24VDC 16 kHz PWM T24**


Total Wattage: **60(-)96W max**

Input Voltage: **110-277V 50/60Hz**

www.emcod.com

Conforms to UL STD. 8750 and 1310
Certified to CSA
STD. C22.2 № 223
Link to certification



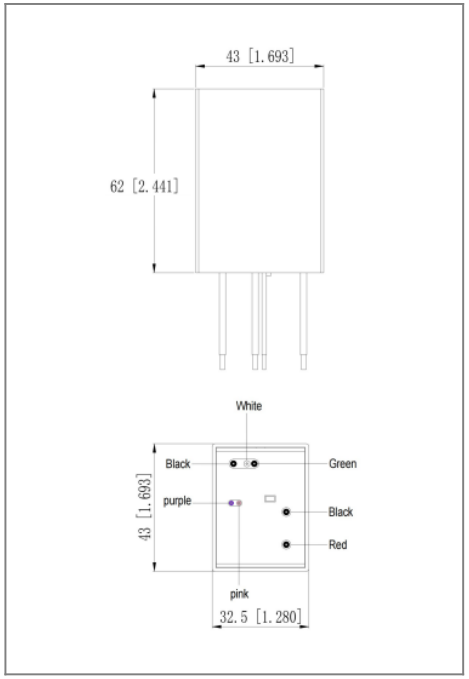



Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM
Temperature class B(130°C)
Input leads are 18AWG 600V
Output leads are 18AWG 300V
Leads max. operational temperature is 105°C

Housing

The actual transformer 60(-)96W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, Dry, Damp and Wet Location rated
Working ambient temperature range: -40°C (-40°F) to 60°C (140°F)
Enclosure Temperature does not exceed 75B°C working temper at 45°C ambient and fully loaded
Dimensions (inch): H = 0, W = 0, D = 0
Weight (LBs): 0

Electrical Parameters

Input Voltage:	**110-277V 50/60Hz**
Max. input current at full load:	**0.6A**
Output voltage without load:	**12.1VDC**
Output voltage fully loaded:	**12VDC**
Max. Total Wattage:	**60(-)96W**
Max. Output Current:	**5A**
Efficiency:	**90%**
Load regulation:	**1%**
Ripple:	**0%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 techsupport@emcod.com