

# EDD160C2-24DC

## Electronic Build In Dimmer

Aluminum Enclosure



Double Circuit: **24VDC 16 kHz PWM T24**

Total Wattage: **160W max**

Input Voltage: **120V 50/60Hz**



Conforms to UL STD. 8750  
Certified to CSA  
STD. C22.2 No 250.13

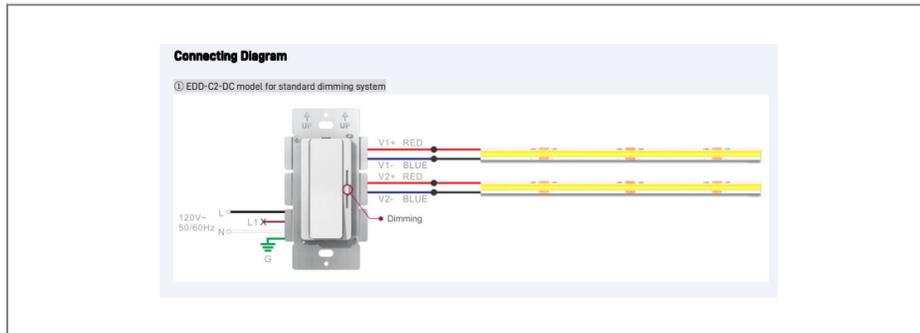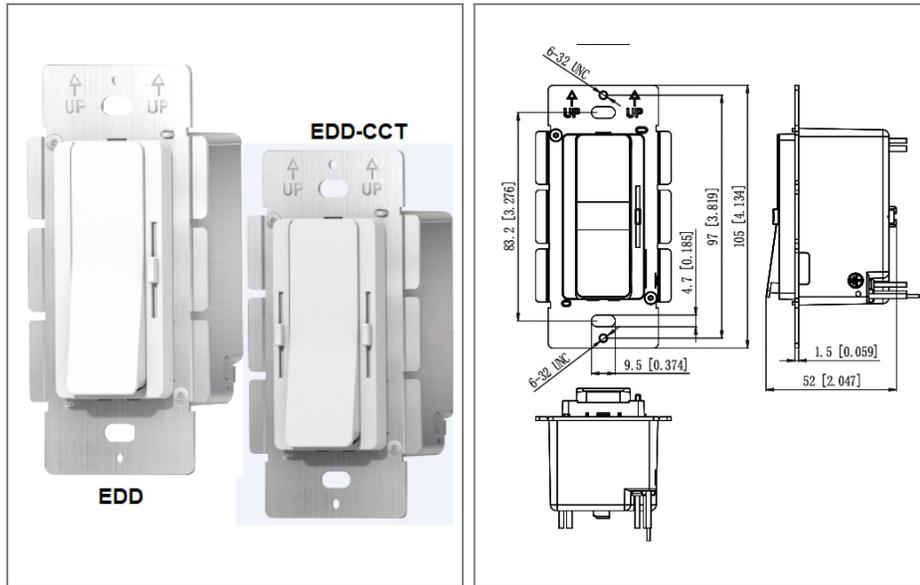

### Transformer

Build In Dimmer

Temperature class B(130°C)

Input leads are 18AWG 600V

Output leads are 18AWG 300V

Leads max. operational temperature is 105°C per circuit

### Housing

The actual transformer 160W is encapsulated in the enclosure

The enclosure is Aluminum, with built-in class 2 wiring compartment, dry and damp location rated

Working ambient temperature range: -40°C (-40°F) to 60°C (140°F)

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 0, W = 0, D = 0

Weight (LBs): 0

### Electrical Parameters

Input Voltage: **120V 50/60Hz**

Max. input current at full load: **1.5A**

Output voltage without load: **24VDC**

Output voltage fully loaded: **23.8VDC**

Max. Total Wattage: **160W** Max. per circuit: **80W**

Max. Output Current: **6.6A** per circuit.

Efficiency: **93%**

Load regulation: **1%**

Ripple: **0%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 [info@emcod.com](mailto:info@emcod.com) [techsupport@emcod.com](mailto:techsupport@emcod.com)