

EDD96-24DC

Class 2 Electronic Build In Dimmer

Aluminum Enclosure


Single Circuit: **24VDC 16 kHz PWM T24**

Total Wattage: **96W max**

Input Voltage: **120V 50/60Hz**



Conforms to UL STD. 8750
Certified to CSA
STD. C22.2 № 250.13

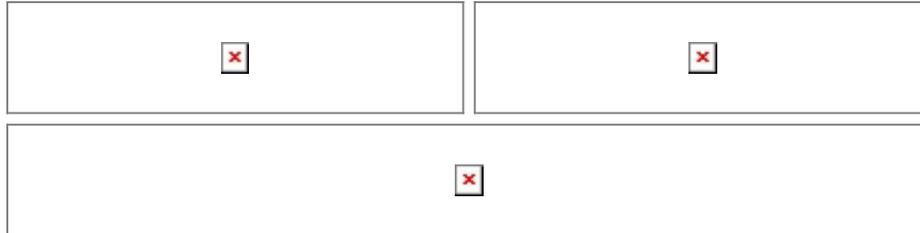

Transformer

Build In Dimmer

Housing

The actual transformer 96W is encapsulated in the enclosure

The enclosure is Aluminum, with built-in class 2 wiring compartment, dry and damp location rated

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 0, W = 0, D = 0

Weight (LBs): 0

Electrical Parameters

Input Voltage: **120V 50/60Hz**

Max. input current at full load: **0.6A**

Output voltage without load: **0VDC**

Output voltage fully loaded: **0VDC**

Max. Total Wattage: **96W**

Max. Output Current: **5A**

Efficiency: **90%**

Load regulation: **2%**

Ripple: **0%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 info@emcod.com techsupport@emcod.com