

EDD96-24DC-CCT

Class 2 Electronic Build In Dimmer

Aluminum Enclosure

Single Circuit: **24VDC 16 kHz PWM T24**

Total Wattage: **96W max**


Input Voltage: **120V 50/60Hz**



www.emcod.com



Conforms to UL STD. 8750
Certified to CSA
STD. C22.2 No 250.13

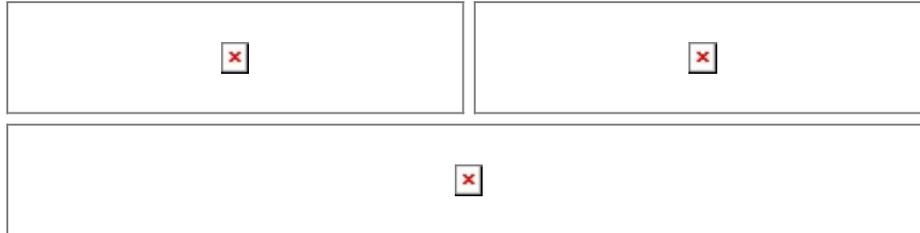

Transformer

Build In Dimmer

Housing

The actual transformer 96W is encapsulated in the enclosure

The enclosure is Aluminum, with built-in class 2 wiring compartment, dry and damp location rated

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 0, W = 0, D = 0

Weight (LBs): 0

Electrical Parameters

Input Voltage: **120V 50/60Hz**

Max. input current at full load: **0.9A**

Output voltage without load: **24VDC**

Output voltage fully loaded: **26VDC**

Max. Total Wattage: **96W**

Max. Output Current: **4A**

Efficiency: **91%**

Load regulation: **1%**

Ripple: **0%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 info@emcod.com techsupport@emcod.com