

MLE60-12DC-P-EU

Class 2 Electronic Phase cut Dimmable

Outdoor Plastic Suitable For Dry And Damp Location
Enclosure

Single Circuit: **12VDC**

Total Wattage: **60W max**

Input Voltage: **230V 50/60Hz**




CE

WSCT1304001634SE

Installation Instruction for



- * Read instruction completely before installation.
- * Turn off electricity before wiring.
- * Only qualified personal should install the unit
- * Installation must comply with the NEC.
- * Ensure the unit has input, output voltage and output wattage proper for your application.

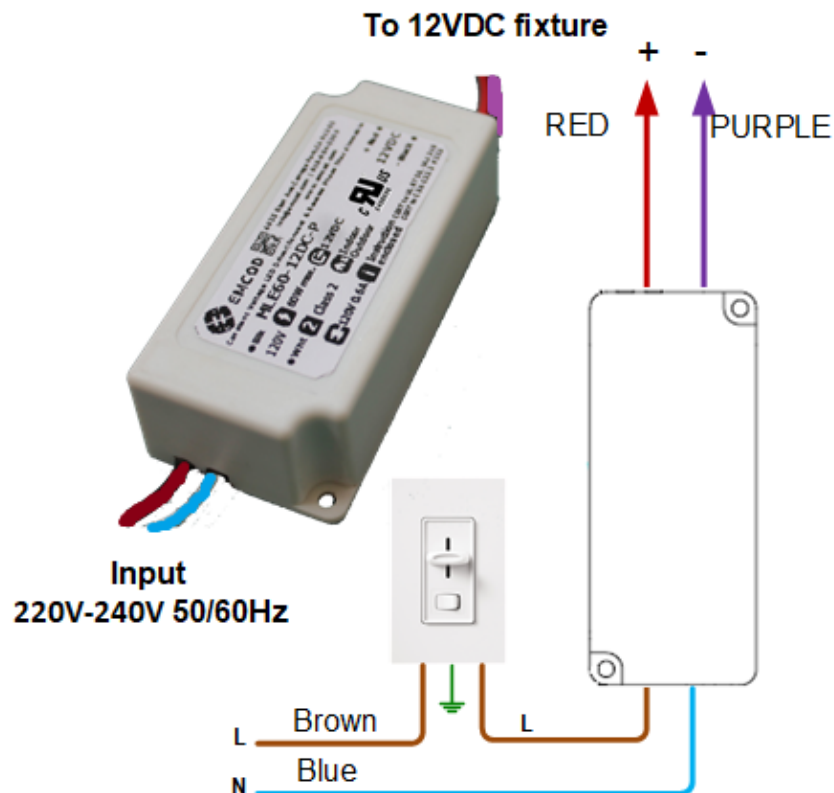

Mounting

The transformer must be mounted in at least 5" of a free flow air space for proper ventilation.

The transformer must never be mounted next to or above heat radiated objects.

The maximum ambient temperature should not exceed 50 deg. C (110 deg. F)

Suitable for dry or damp location, IP20.

Input Connection

Bring your line and neutral wires and connect them to the driver's **Brown** and **Blue** lead wires.

Output Connection

Bring your lights wires and connect to the driver's lead wires, + to Red – to Purple
Make sure all your connection are tight

Grounding

If use junction box connect your power's ground to the junction box ground screw.

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com