EM200S24DC277

Magnetic Phase cut Dimmable

Outdoor Black Powder Coated Steel Enclosure

Single Circuit: **24VDC**

Total Wattage: **200W max**

Input Voltage: **277V 60Hz**


EMCOD Lighting Group


www.emcod.com

4008104

Conforms to UL STD. 2108
Certified to CSA
STD. C22.2 № 250.0
model EM150
Link to certification



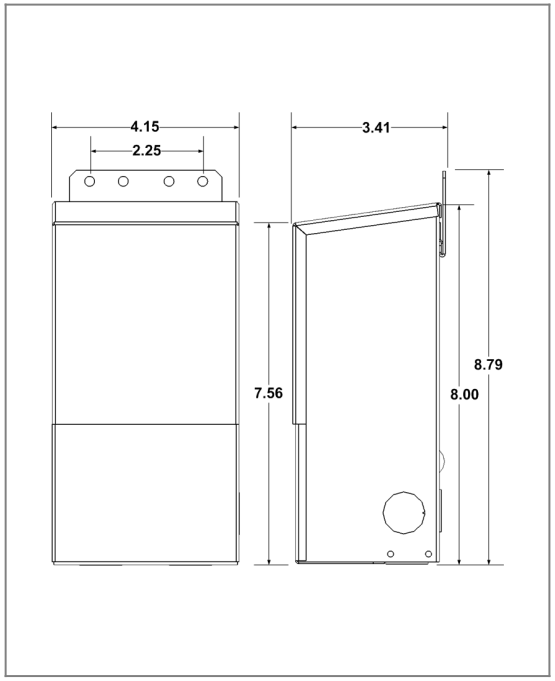

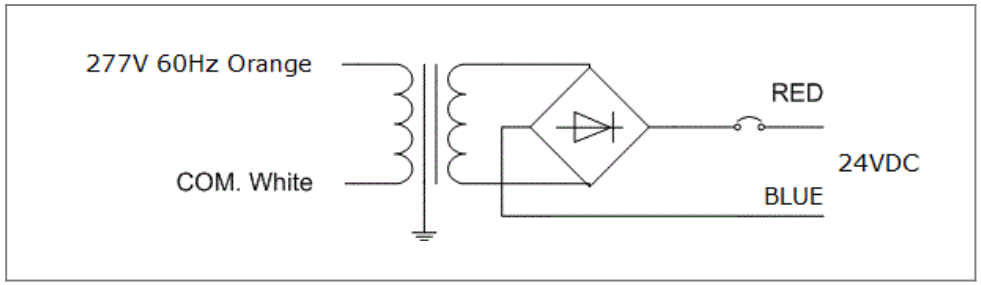

Transformer

Dimmable with compatible MLV, ELV, CL dimmers, please refer to list on emcod.com
Temperature class B(130°C)
Two section bobbin completely separated primary and secondary windings
Input leads are 18AWG 600V
Output leads are 12AWG 300V
Leads max. operational temperature is 105°C
Thermal manually reset secondary breaker 13A

Housing

The actual transformer 200W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, NEMA 3R rated
Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors
Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded
Dimensions (inch): H = 8, W = 4.15, D = 3.41
Weight (LBs): 0.9

Electrical Parameters

Input Voltage:	**277V 60Hz**
Max. input current at full load:	**2A**
Output voltage without load:	**25.7VDC**
Output voltage fully loaded:	**23.5VDC**
Max. Total Wattage:	**200W**
Max. Output Current:	**8.3A**
Efficiency:	**93%**

Mailing Address: 6925 Eton Ave. Canoga Park, CA 91303 Tech support: Arik Nirenberg phone: 818-904-3309 cellphone: 818-269-4091
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com