ML40S24DC277


Class 2 Magnetic


Outdoor Black Powder Coated Steel Enclosure
Single Circuit: **24VDC**
Total Wattage: **40W max**
Input Voltage: **277V 60Hz**

www.emcod.com

Conforms to UL STD. 1310
Certified to CSA
STD. C22.2 № 223
model EM50
4008104
[Link to certification]



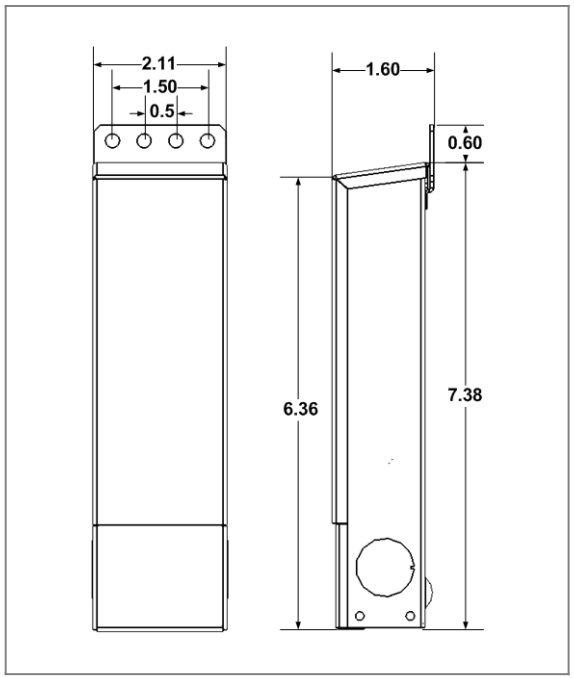

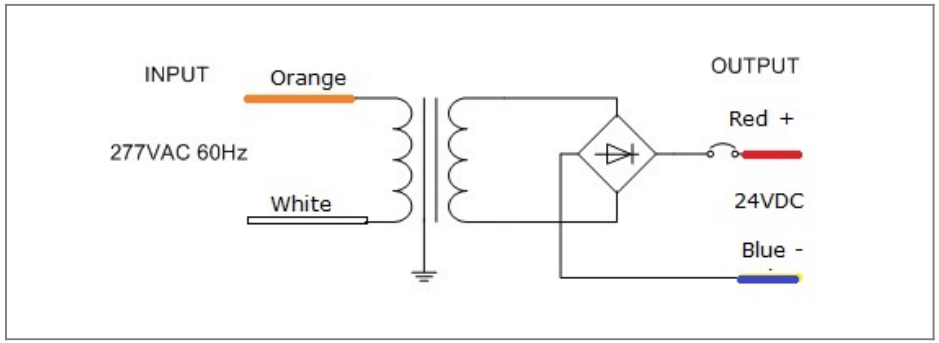

Transformer

Temperature class B(130°C)
Input leads are 18AWG 600V
Output leads are 18AWG 300V
Thermal self reset secondary breaker 4A

Housing

The actual transformer 40W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, NEMA 3R rated
Wiring compartment has 2 knockouts sizes for 3/8 inch screw cable connectors
Enclosure Temperature does not exceed 65°C at 45°C ambient and fully loaded
Dimensions (inch): H = 7, W = 2.11, D = 1.54
Weight (LBs): 2.25

Electrical Parameters

Input Voltage:	**277V 60Hz**
Max. input current at full load:	**0.4A**
Output voltage without load:	**26.5VDC**
Output voltage fully loaded:	**23.5VDC**
Max. Total Wattage:	**40W**
Max. Output Current:	**1.7A**
Efficiency:	**85%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com