EGP1000P12AC


Magnetic


Outdoor Black Powder Coated Steel Enclosure
Multi Circuit: **12/24VAC**
Total Wattage: **1000W max**
Input Voltage: **120V 60Hz**

www.emcod.com

Conforms to UL STD.
Certified to CSA
STD. C22.2 № ETL Recognized
model -
4008104
Link to certification



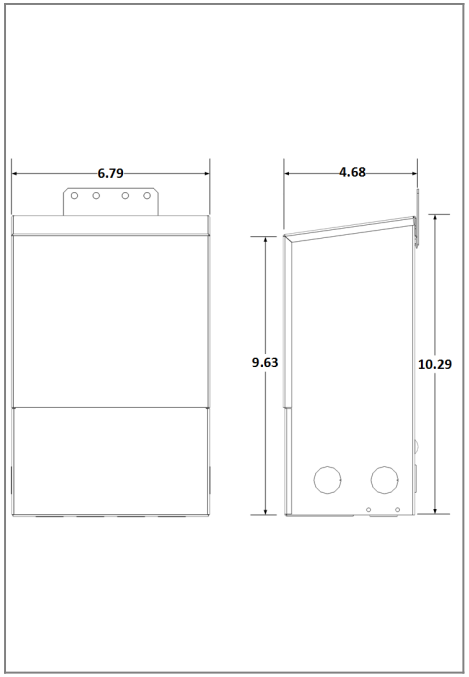

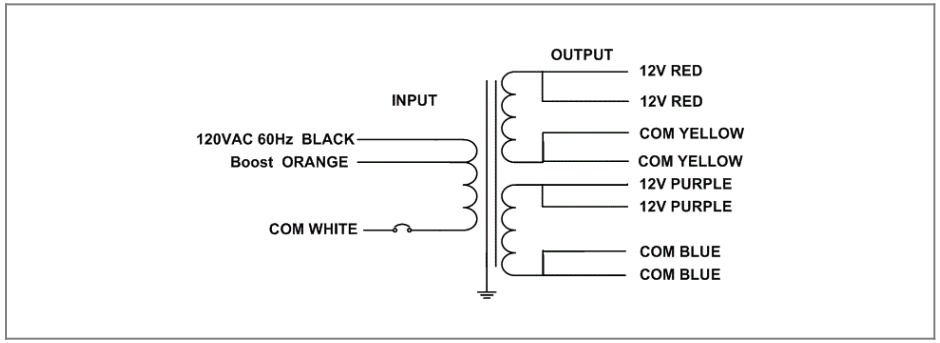

Transformer

Temperature class B(130°C)
Two section bobbin completely separated primary and secondary windings
Input leads are 18AWG 600V
Output leads are 12AWG 300V
Leads max. operational temperature is 105°C
Thermal manually reset primary breaker 16A per circuit

Housing

The actual transformer 1000W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, NEMA 3R rated
Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors
Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded
Dimensions (inch): H = 10.29, W = 6.78, D = 5.62
Weight (LBs): 3

Electrical Parameters

Input Voltage:	**120V 60Hz**	
Max. input current at full load:	**9A**	
Output voltage without load:	**12.7/ 25.8VAC**	
Output voltage fully loaded:	**12/ 24VAC**	
Max. Total Wattage:	**1000W**	Max. per circuit: **250W**
Max. Output Current:	**20.8/ 10.4A** per circuit.	
Efficiency:	**95%**	
Load regulation:	**0.05%**	

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com