EM600S12/24DC

Magnetic Phase cut Dimmable

Outdoor Black Powder Coated Steel Enclosure

Double Circuit: **12/24VDC**

Total Wattage: **600W max**


Input Voltage: **120V 60Hz**


EMCOD Lighting Group

www.emcod.com

Conforms to UL STD. 2108
Certified to CSA
STD. C22.2 № 250.0
model EM600
4008104
Link to certification



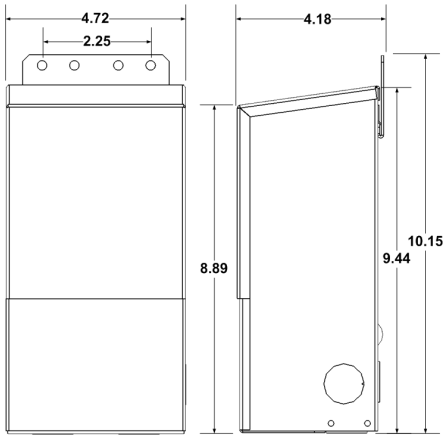

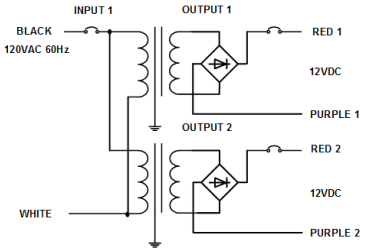

Transformer

Dimmable with compatible MLV, ELV, CL dimmers, please refer to list on emcod.com
Temperature class B(130°C)
Two section bobbin completely separated primary and secondary windings
Input leads are 18AWG 600V
Output leads are 12AWG 300V
Leads max. operational temperature is 105°C
Thermal manually reset primary breaker 10A
Thermal manually reset secondary breaker 25A per circuit

Housing

The actual transformer 600W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, NEMA 3R rated
Wiring compartment has 12 knockouts sizes for 3/8 inch screw cable connectors
Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded
Dimensions (inch): H = 10.29, W = 6.79, D = 4.68
Weight (LBs): 18

Electrical Parameters

Input Voltage:	**120V 60Hz**	
Max. input current at full load:	**6A**	
Output voltage without load:	**12.5/ 25VDC**	
Output voltage fully loaded:	**11.5/ 23.5VDC**	
Max. Total Wattage:	**600W**	Max. per circuit: **300W**
Max. Output Current:	**25A** per circuit.	
Efficiency:	**93%**	

Mailing Address: 6925 Eton Ave. Canoga Park, CA 91303 Tech support: Arik Nirenberg phone: 818-904-3309 cellphone: 818-269-4091
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com