ML60S24DC277

Class 2 Magnetic

Outdoor Black Powder Coated Steel Enclosure

Single Circuit: **24VDC**

Total Wattage: **60W max**


Input Voltage: **277V 60Hz**


www.emcod.com

Conforms to UL STD. 1310
Certified to CSA
STD. C22.2 № 223
model EM60
Link to certification

4008104



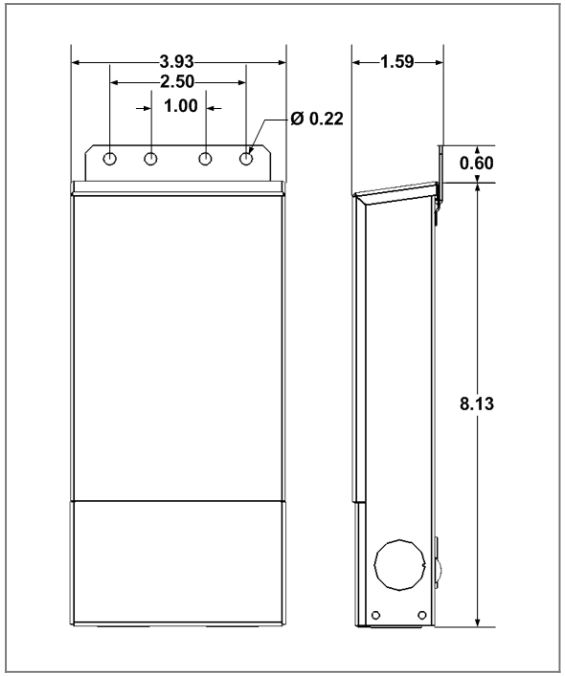

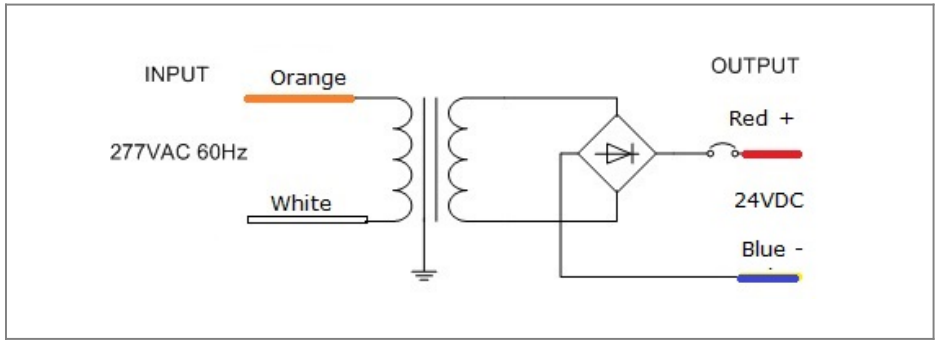

Transformer

Temperature class B(130°C)
Input leads are 18AWG 600V
Output leads are 18AWG 300V
Leads max. operational temperature is 105°C
Thermal manually reset secondary breaker 4A

Housing

The actual transformer 60W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, NEMA 3R rated
Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors
Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded
Dimensions (inch): H = 8.13, W = 3.93, D = 1.59
Weight (LBs): 0.4

Electrical Parameters

Input Voltage:	**277V 60Hz**
Max. input current at full load:	**0.6A**
Output voltage without load:	**27.2VDC**
Output voltage fully loaded:	**23.5VDC**
Max. Total Wattage:	**60W**
Max. Output Current:	**2.5A**
Efficiency:	**85%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com