

## ECV60-12DC

### Class 2 Electronic EV

Outdoor Aluminum With Wire Compartment Enclosure


Single Circuit: **12VDC 400Hz**

Total Wattage: **60W max**

Input Voltage: **120V 50/60Hz**



Conforms to UL STD. 1310  
Certified to CSA  
STD. C22.2 No 223

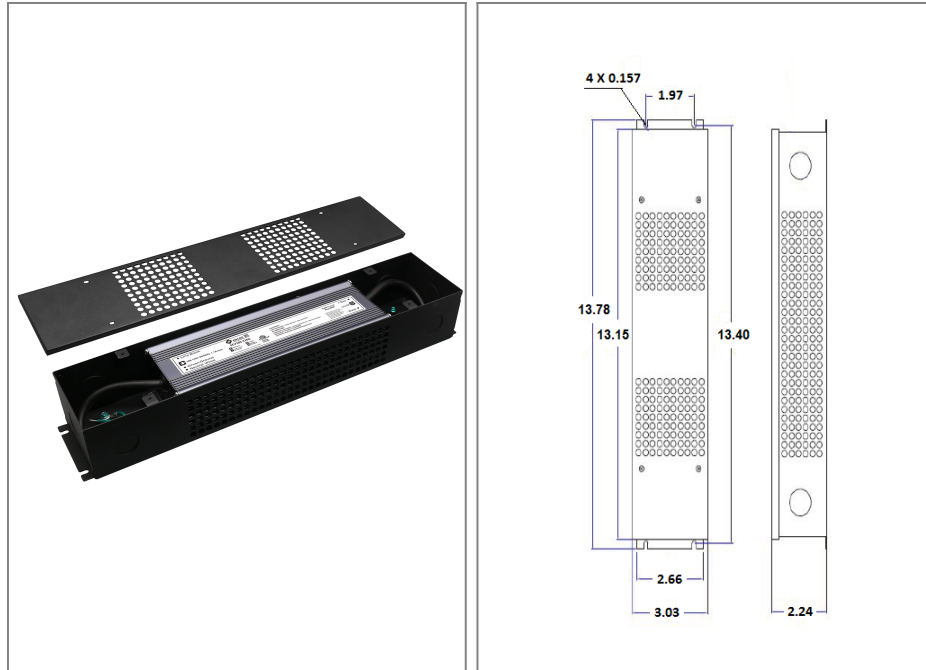

### Transformer

Dimmable with any ELV, MLV, CL, forward or reverse phase.

Input leads are 18AWG 600V

Output leads are 18AWG 300V

Leads max. operational temperature is 105°C

### Housing

The actual transformer 60W is encapsulated in the enclosure

The enclosure is Aluminum with wire compartment, IP 67 rated

Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded

Dimensions (inch): H = 13.15, W = 3.03, D = 2.24

Weight (LBs): 0.35

### Electrical Parameters

Input Voltage: **120V 50/60Hz**

Max. input current at full load: **0.76A**

Output voltage without load: **12.1VDC**

Output voltage fully loaded: **12VDC**


Max. Total Wattage: **60W**

Max. Output Current: **5A**

Efficiency: **85%**

Load regulation: **1%**

Ripple: **5%**

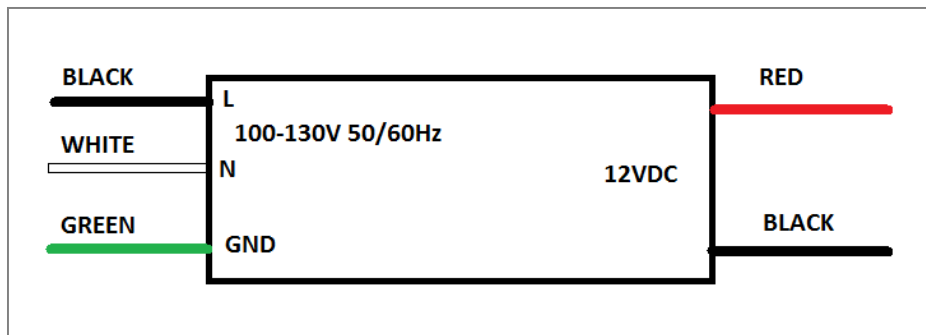

Mailing Address: 646 Flinn Ave. Unit B, Moorpark, CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 info@emcod.com techsupport@emcod.com