

MLE96-24DC-P

Class 2 Electronic Phase cut Dimmable

Outdoor Plastic Suitable For Dry And Damp Location
Enclosure

Single Circuit: **24VDC 120Hz**

Total Wattage: **96W max**


Input Voltage: **120V 50/60Hz**



www.emcod.com

C **UL** **US**
E498696

Conforms to UL STD. 8750 and 1310
Certified to CSA
STD. C22.2 № 223
model MLE96-24DC-P

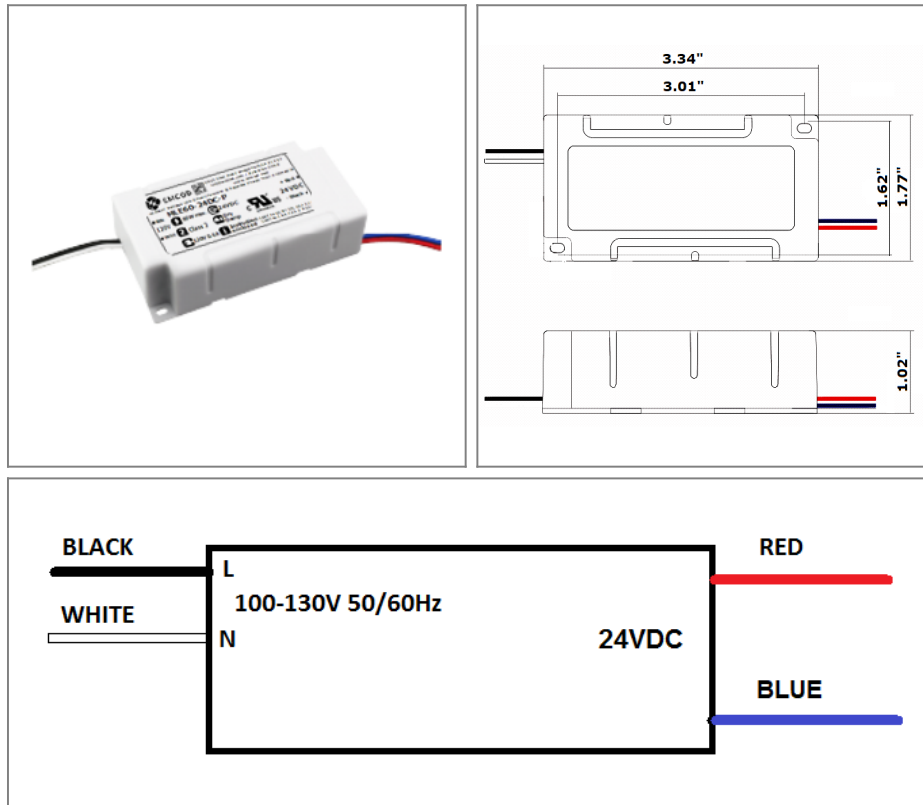

Transformer

Dimmable with compatible MLV, ELV, CL dimmers, please refer to list on emcod.com

Temperature class B(130°C)

Input leads are 18AWG 600V

Output leads are 18AWG 300V

Leads max. operational temperature is 105°C

Housing

The actual transformer 96W is encapsulated in the enclosure

The enclosure is Plastic suitable for dry and damp location, fit in 4" junction box, IP20 rated

Enclosure Temperature does not exceed 90°C at 45°C ambient and fully loaded

Dimensions (inch): H = 1.77, W = 3.34, D = 1.02

Weight (LBs): 0.4

Electrical Parameters

Input Voltage: **120V 50/60Hz**

Max. input current at full load: **1A**

Output voltage without load: **25.5VDC**

Output voltage fully loaded: **23.5VDC**

Max. Total Wattage: **96W**

Max. Output Current: **4A**

Efficiency: **89%**

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com