


## ECV96-24DC-UD

**Class 2 Electronic UNIV 5 in 1 dimming**  
Outdoor Black Powder Coated Steel Enclosure  
Single Circuit: **24VDC 4kHz PWM or Linear**  
Total Wattage: **96W max**  
Input Voltage: **100-277V 50/60Hz**



Conforms to UL STD. 8750  
Certified to CSA  
STD. C22.2 No 250.0

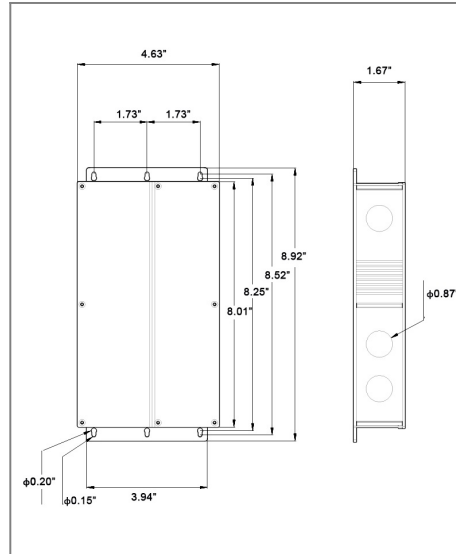

### Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM  
Input leads are 18AWG 600V  
Output leads are 18AWG 300V  
Leads max. operational temperature is 105°C

### Housing

The actual transformer 96W is encapsulated in the enclosure  
The enclosure is Black Powder Coated Steel, NEMA 4X rated  
Wiring compartment has 8 knockouts sizes for 3/8 inch screw cable connectors  
Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded  
Dimensions (inch): H = 8.92, W = 4.63, D = 1.67  
Weight (LBs): 2.4

### Electrical Parameters

Input Voltage: **100-277V 50/60Hz**

Max. input current at full load: **1.3A**

Output voltage without load: **24.1VDC**


Output voltage fully loaded: **24VDC**

Max. Total Wattage: **96W**

Max. Output Current: **4A**

Efficiency: **86%**

Load regulation: **1%**

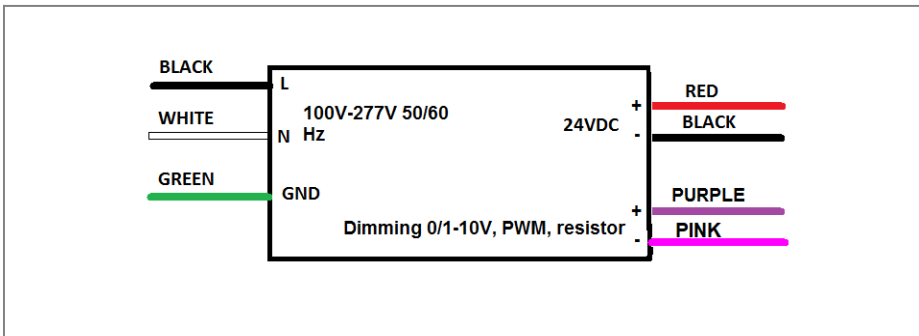

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309  
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com