


Driver + Dimmer (2in1 LED Constant Voltage 2Channels EDD-C2 Series PWM Output

EDD160C2-24DC

Whole Family: EDDxxxC2-xxDC DC- (xx=12V 24V 48V) [60W 96W 100W 120W 160W]



FC Class 2 Class P SELV RoHS Reach

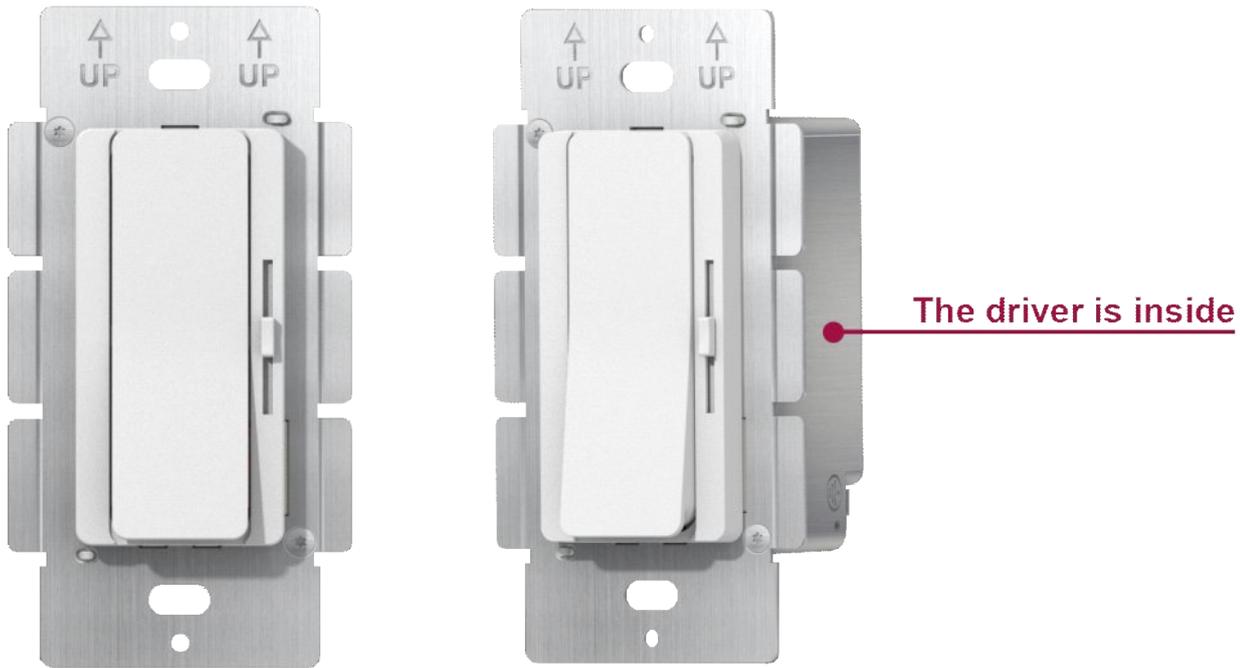

Features

Output:	Constant Voltage
Input Range:	120VAC
PFC design:	Built-in active PFC function
Protections:	Short circuit/ Over load/ Over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	For dry and damp locations (US)
Design features:	<ol style="list-style-type: none"> 1) Fine-tune output voltage can be adjusted slightly 2) Preset dimmer with on/off function 3) 3-Way switches 4) Class 2 output 5) Eliminated compatibility issues between drivers and switches
Dimming range:	0.3%-100%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty
Others:	16KHZ PWM output with dimming curve is a gamma 2.2 curve Flicker-free


Driver + Dimmer (2 in 1) LED Constant Voltage Driver multiple channel Class 2
EDD-C2-DC series PWM output 120W 160W

Specification


Model		EDD120C2-12DC	EDD160C2-24DC	EDD160C2-48DC
Certificate		UL / cUL / FCC / Class 2 / Class P / SELV / RoHS / Reach		
Output	DC Rate Voltage	12V (12V-13.5V adjust by knob)	24V (24V-26V adjust by knob)	48V (48V-50V adjust by knob)
	Voltage Tolerance	±0.5V		
	Load Regulation	≤2%	≤1%	≤1%
	Line Regulation	≤0.5%		
	Rated current	2*5A	2*3.33A	2*1.67A
	Rated power	120W (2*60W)	160W (2*80W)	160W (2*80W)
	Voltage Ripple	3%	2%	1%
Input	Voltage Range	120VAC		
	Frequency Range	60Hz		
	Power Factor @ full load	0.99		
	THD (Typ.) @ full load	≤10%		
	Efficiency @ full load	93.3%	94.5%	95%
	AC Current (Max.)	1.1A	1.5A	1.5A
	Inrush Current (Typ.)	54A, 290us@50%Ipeak		
	Leakage current	<0.5mA		
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed		
	Over Load	≥110% Constant current mode, recovers automatically after fault condition is removed		
	Over temperature	Shell surface temperature 100°C±10°C shut down o/p voltage, automatically recover after cooling		
Environment	Working TEMP.	-40~+60°C (see below derating curve)		
	Working Humidity	20 - 95%RH non-condensing		
	Storage TEM.,Humidity	-40 - +80°C, 10 - 95% RH non-condensing		
	TEMP.coefficient	±0.03%/°C (0 - 50°C)		
	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72 min. each along X,Y,Z axes		
Safety & EMC	Safety standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)		
	Withstand voltage	I/P-O/P:1.8KVAC I/P-F/G:1.8KVAC O/P-F/G:0.5KVAC (US)		
	Isolation resistance	I/P-O/P:100MΩ / 500VDC / 25°C / 70% RH		
	EMC Immunity	FCC/ICES do not request this test (US)		
	EMC Emission	FCC Part15 Subpart B ANSI C63.4:2014 (US)		
Others	Net Weight	0.27KG		
	Dimension	105*54*52mm / 4.134"x2.126"x2.047" (Inch)		
	Packing			
Notes	1. All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25°C of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation .			

**Driver + Dimmer (2 in 1) LED Constant Voltage Driver multiple channel Class 2
EDD-C2-DC series PWM output 120W 160W**


Efficiency Curve (efficiency vs output load)

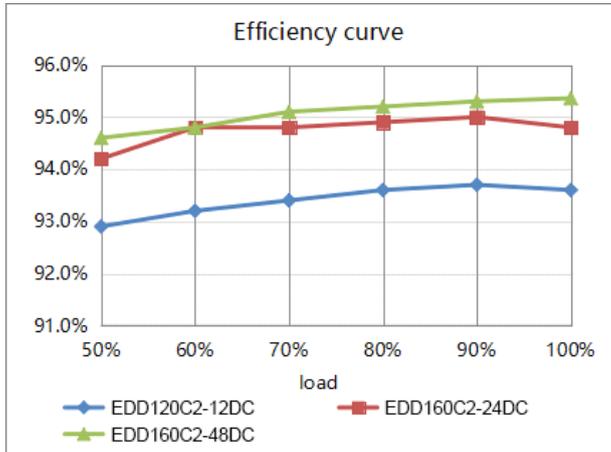

Power factor curve

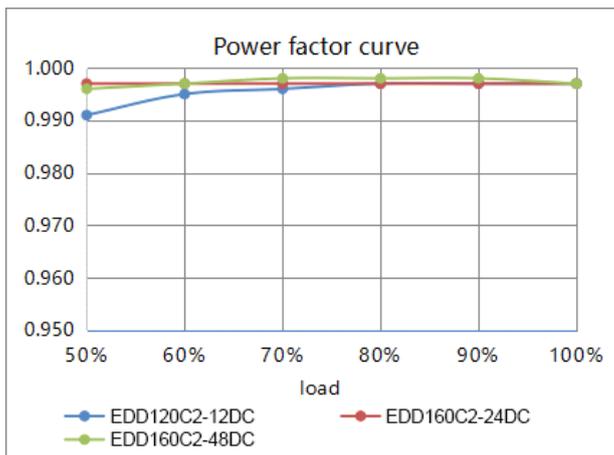


Derating Curve (Output power VS Ambient TEMP)

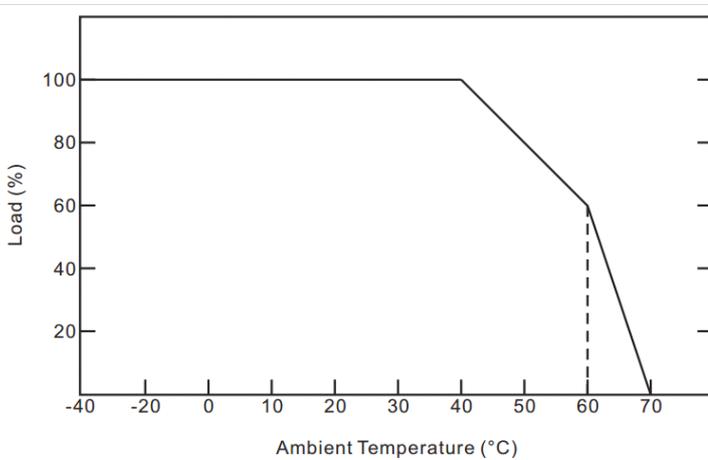

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. The output current of the LED driver should be selected according to the rated current of the lamp and the ambient temperature. Normally, we recommend the power supply to reserve a certain amount of load to extend LED driver's life .

**Driver + Dimmer (2 in 1) LED Constant Voltage Driver multiple channel Class 2
EDD-C2-DC series PWM output 120W 160W**

Mechanical Specification

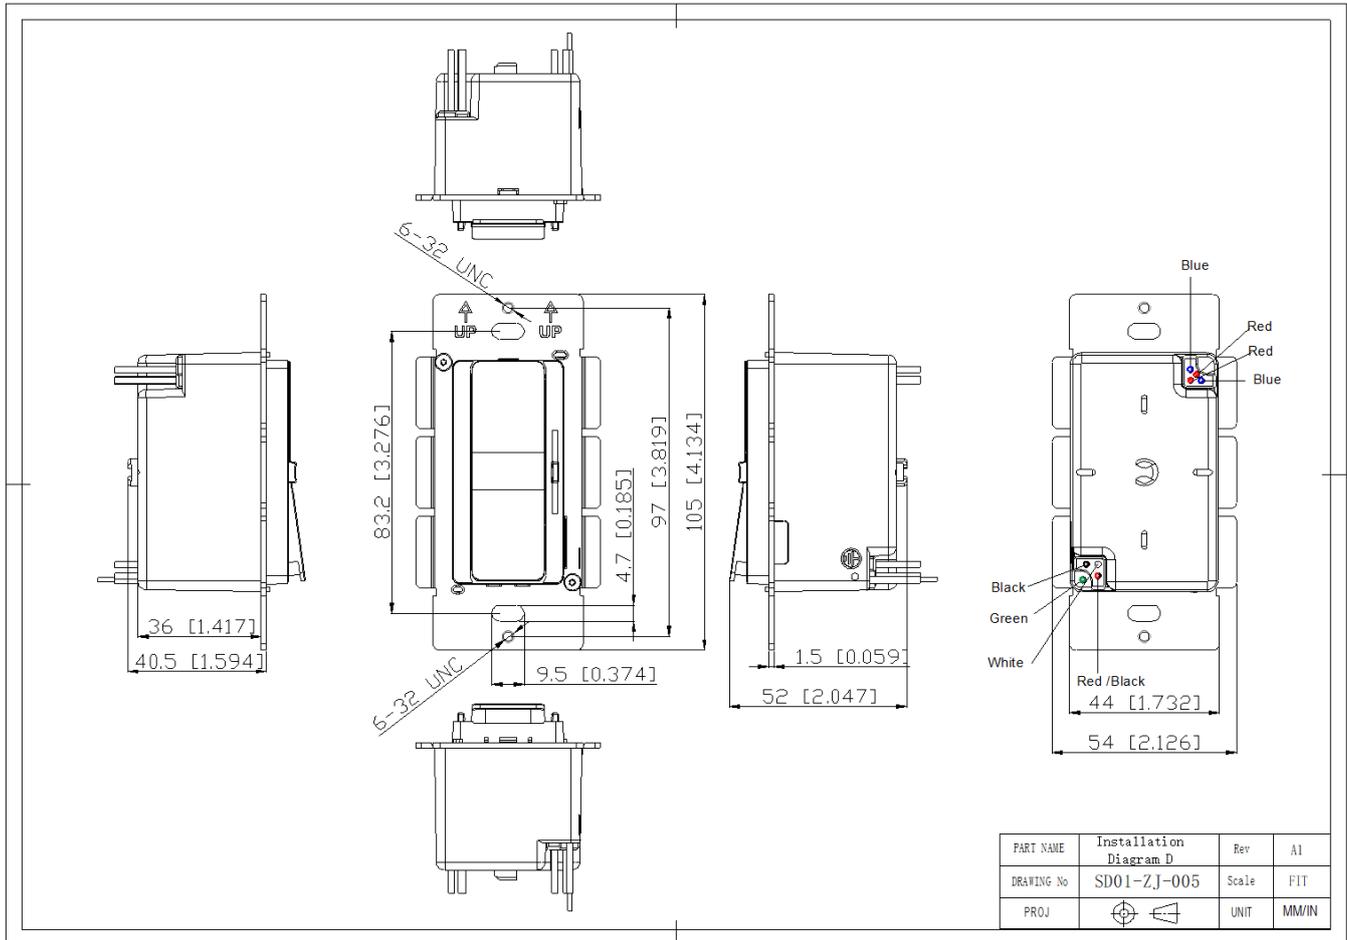

American Wire Gauge SD01	
Input wires	Black cable (L), Red black cable (L1), White cable (N) and Green cable (FG) (4*18AWG)
Output wires	Class 2 two channels output : Red cable (V+) and Blue cable (V-) separate for two groups (4*18AWG)


Warm tips:

1. Any other requests for, we can customize.
2. Please ensure that the connection is correct.


Driver + Dimmer (2 in 1) LED Constant Voltage Driver multiple channel Class 2
EDD-C2-DC series PWM output 120W 160W

Connecting Diagram

① EDD-C2-DC model for standard dimming system

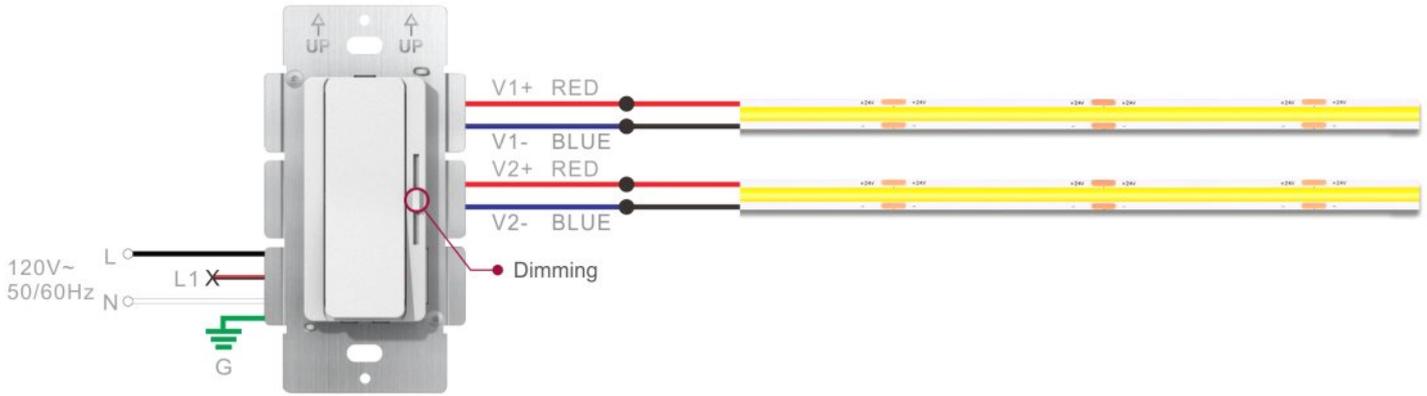

② EDD-C2-DC model for 3-way dimming system

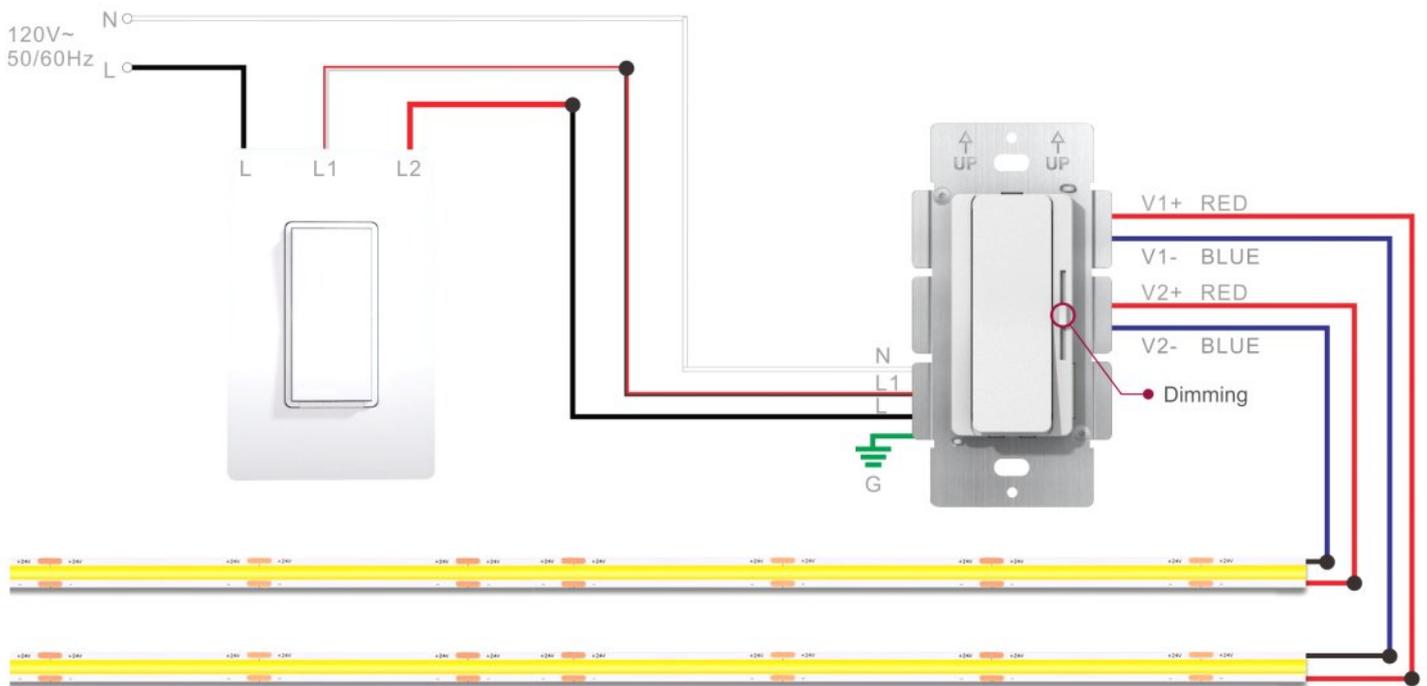


Note: Dimmer's panel is not replaceable.

Driver + Dimmer (2 in 1) LED Constant Voltage Driver multiple channel Class 2
EDD-C2-DC series PWM output 120W 160W

Knob to adjust the voltage

Clockwise rotation of the high voltage

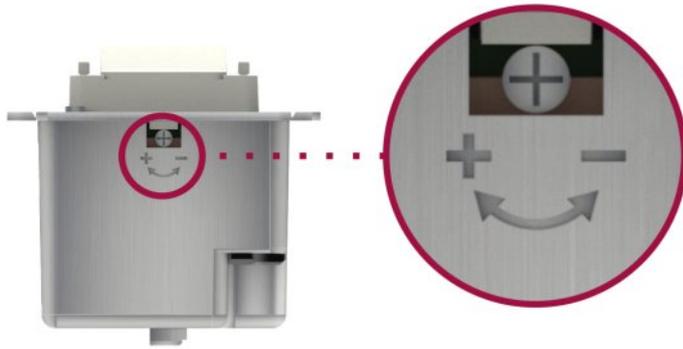

Output Volt. Adjustment

12V output volt. : 12-13. 5V

24V output volt. : 24-26V

48V output volt. : 48-50V

Instructions

1. This driver+dimmer 2 in 1 should be installed by qualified and professional person.
2. Please make sure the driver+dimmer 2 in 1 is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that connection is correct to avoid LED light or driver+dimmer 2 in 1 be damaged.
4. If the driver+dimmer 2 in 1 cannot work normally, don't maintain privately.

Have any questions, please contact with EMCOD.

Please visit our website or contact us for more information! www.emcod.com