

EVC96-xx(12/24/36

Electronic UNIV 5 in 1 dimming

Outdoor Black Powder Coated Steel Enclosure

Single Circuit: **12/24/36/48V 20kHz PWM, T24 JA-8**

Total Wattage: **96W max**

Input Voltage: **110-277V 50/60Hz**



Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM

Housing

The actual transformer 96W is encapsulated in the enclosure

The enclosure is Black Powder Coated Steel, Dry, Damp and Wet Location rated

Dimensions (inch): H = 0, W = 0, D = 0

Weight (LBs): 0

Electrical Parameters

Input Voltage: **110-277V 50/60Hz**

Max. input current at full load: **0A**

Output voltage without load: **12V**

Output voltage fully loaded: **11.9V**


Max. Total Wattage: **96W**

Max. Output Current: **0A**

Efficiency: **0%**

Load regulation: **0%**

Ripple: **0%**

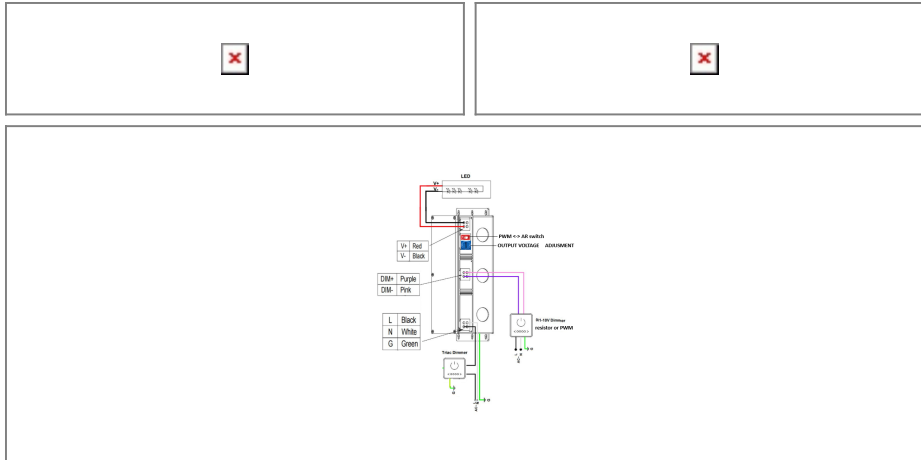

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309

Fax: 818 904 3327 techsupport@emcod.com