

## MLE150-24DC

### Electronic Class P Triac Dimmable

Outdoor Black Powder Coated Steel Enclosure


Single Circuit: **24VDC 450Hz**

Total Wattage: **150W max**

Input Voltage: **110-277V 50/60Hz**



Conforms to UL STD. 8750  
Certified to CSA  
STD. C22.2 No 250.13  
model MLE120-24DC

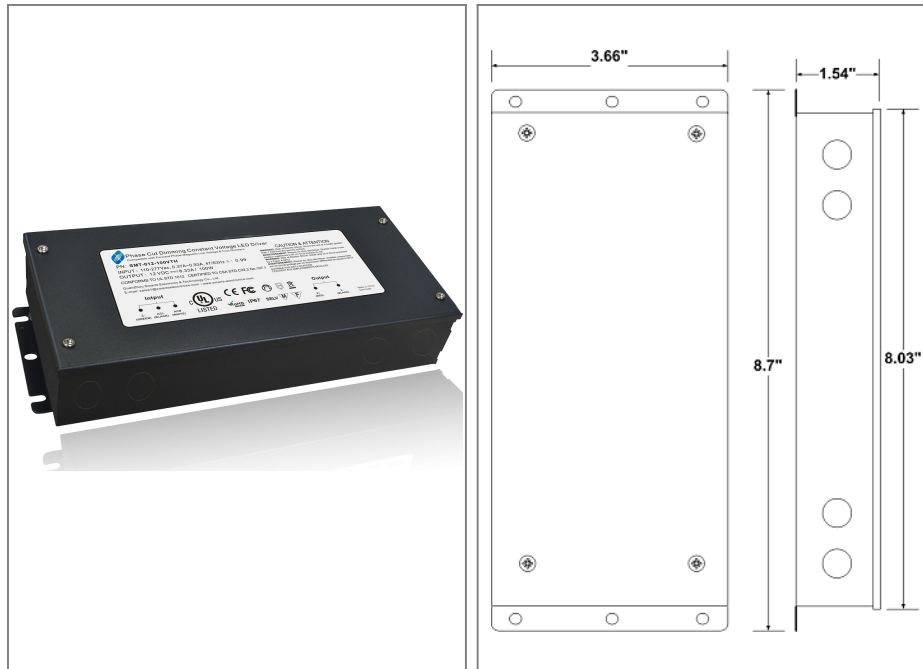

### Transformer


PWM output. Dimmable with any ELV, MLV, CL, forward or reverse phase.  
Input leads are 18AWG 600V  
Output leads are 16AWG 300V  
Leads max. operational temperature is 105°C

### Housing

The actual transformer 150W is encapsulated in the enclosure  
The enclosure is Black Powder Coated Steel, with built-in class 2 wiring compartment, dry and damp location rated  
Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors  
Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded  
Dimensions (inch): H = 10.3, W = 4.06, D = 1.77  
Weight (LBs): 0.4

### Electrical Parameters

Input Voltage:	<b>110-277V 50/60Hz</b>
Max. input current at full load:	<b>1.8A</b>
Output voltage without load:	<b>24.1VDC</b>
Output voltage fully loaded:	<b>24VDC</b>
Max. Total Wattage:	<b>150W</b>
Max. Output Current:	<b>6.2A</b>
Efficiency:	<b>90%</b>
Load regulation:	<b>1%</b>
Ripple:	<b>5%</b>

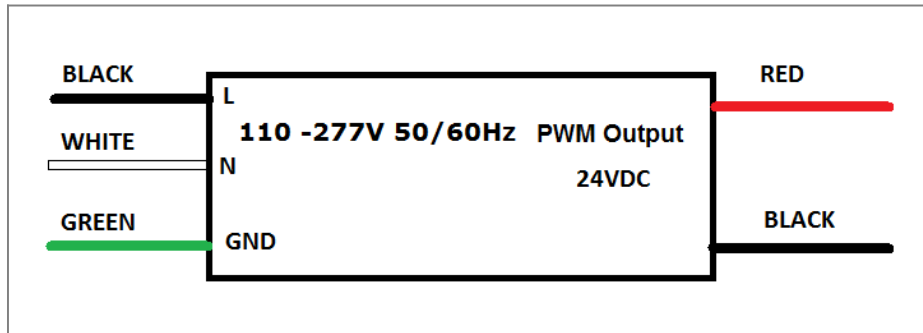

Mailing Address: 646 Flinn Ave. Unit B, Moorpark, CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309  
Fax: 818 904 3327 [info@emcod.com](mailto:info@emcod.com) [techsupport@emcod.com](mailto:techsupport@emcod.com)